

A precision masterpiece, the Rollei 35 T is the ideal camera for general, everyday use. The first truly small full-frame 35mm, it's the perfect take-along camera because it has the essentials for fine performance without cumbersome bulk or technical complexity. The Rollei 35 has swept the world in popularity and made photo history.

### Technical Data

**Camera Type:**

Compact, full-frame 35mm.

**Picture Format:**

24 x 36mm.

**Lens:**

Retractable, 4 element, 40mm, f/3.5 Tessar with one-third click stops for aperture range from f/3.5 to f/22; 57° angle of view.

**Lens Focusing Range:**

3 feet to infinity; zone focus ranges marked in red.

**Shutter:**

Compur with settings from 1/2 to 1/500 sec. and B.

**Shutter Release:**

Recessed button on top with cable release socket.

**Exposure Control:**

CdS exposure meter with match-needle system coupled to aperture, shutter and film speed controls.

**Film Speed Range:**

ASA 25 to 1600.

**EV Range:**

4.5 to 18.

**Flash Synchronization:**

Hot shoe contact, at all shutter speeds.

**Film Winding and Loading:**

Accepts any standard 35mm film cartridge; film advances by 180° lever on top; rewind crank in camera bottom; frame counter counts up from 1 to 36, automatically returns to zero when back is removed.

**Viewfinder Data:**

Engraved bright frame showing field of view with parallax correction marks.

**Size:**

3.8 x 2.4 x 1.3 in. (97 x 60 x 32mm)

**Weight:**

13 ounces.  
(370 gms.)

**Exposure Meter Battery:**

Single, 1.35 volt cell (PX 625 or equivalent).

**Other Features:**

Fitting for wrist strap and neck strap; tripod socket (1/4-20 bushing), camera available in chrome and black leatherette or all black finish; supplied with case, wrist strap, lens cap.

**Accessories:**

Rigid leather eveready case; neckstrap; lens hood; filters; special brackets for Rollei flash units adapts hot shoe to PC connection.

**690060** Rollei 35T/3.5 Chrome Body w/Case, Wrist Strap, Lens Cap, Battery.

**690070** Rollei 35T/3.5 Black Body w/Case, Wrist Strap, Lens Cap, Battery.

**The original, compact, precision full-frame 35mm**





With its specially designed, multi-coated Rollei HFT® Sonnar f/2.8 lens, this full-frame Rollei 35S rates as super-camera. The Sonnar formula and HFT® coating set a high in picture quality. Contrast is better, colors more saturated, light transmission increased, lens flare and reflections decreased. And even at the widest apertures, superb quality is maintained.

### Technical Data

**Camera Type:**

Compact, full frame 35mm.

**Picture Format:**

24 x 36mm.

**Lens:**

Retractable, 5 element, 40mm f/2.8 Rollei HFT® Sonnar\* with multicoating; filter M30.5 x 0.5 screw in; aperture range f/2.8 to f/22, one-third click settings; 57° angle of view.

**Lens Focusing Range:**

3 feet to infinity; zone focus ranges.

**Shutter:**

Compur with settings from 1/2 to 1/500 sec. and bulb.

**Shutter Release:**

Recessed button on top with cable release socket.

**Exposure Control:**

CdS exposure meter with match needle system coupled to aperture, shutter and film speed controls.

**Film Speed Range:**

ASA 25 to 1600.

**EV Range:**

4 to 18.

**Flash Synchronization:**

Hot shoe contact, at all shutter speeds.

**Film Winding and Loading:**

Accepts any standard 35mm film cartridge; film advances by 180° lever on top; rewind crank in camera bottom; frame counter up from 1 to 36, automatically returns to zero when back is opened.

**Viewfinder Data:**

Engraved bright line frame showing field of view with parallax marks.

**Size:**

3.8 x 2.4 x 1.3 inches  
(97 x 60 x 32mm)

**Weight:**

13 ounces.  
(370 gms.)

**Exposure Meter Battery:**

Single, 1.35 volt cell (PX 625 or equivalent).

**Other Features:**

Fitting for wrist strap and neck strap, tripod socket (1/4-20 bushing), camera available in chrome and black leatherette or all black finish; supplied with case, wrist strap, lens cap.

**Accessories:**

Rigid leather eveready case; neckstrap; lens hood; filters; special brackets for Rollei flash units\* adapts hot shoe to PC connection.

**690600** Rollei 35S/2.8 Chrome Body w/Case, Wrist Strap, Lens Cap, Battery.

**690601** Rollei 35S/2.8 Black Body w/Case, Wrist Strap, Lens Cap, Battery.

\*Made by the Rollei group under license from Carl Zeiss, Oberkochen, West Germany.



**The compact full-frame 35mm  
with a remarkable new lens**



# B35, 35T, 35S Accessories

January, 1978


# Rollei

## Accessories for Rollei Compact 35's

<b>Soft Case (Replacement)</b>	970465
<b>Eveready Case</b>	970500
<b>Neck Strap</b>	690030
<b>Folding Lens Hoods</b>	
R35T, B35	200500
R35S	200570
<b>UV Haze Filters</b>	
R35T, B35	200560
R35 S	200610
<b>Medium Yellow Filters</b>	
R35T, B35	200520
R35S	200580
<b>Orange Filters</b>	
R35T, B35	200530
R35S	200590
<b>R 1.5 Color Correction Filters</b> (Skylight — for color pictures).	
R35T, B35	200550
B35S	200600
<b>Lens Caps</b> (Replacement)	
R35T, B35, R35S	690020




Filters



Neck Strap



Soft Case

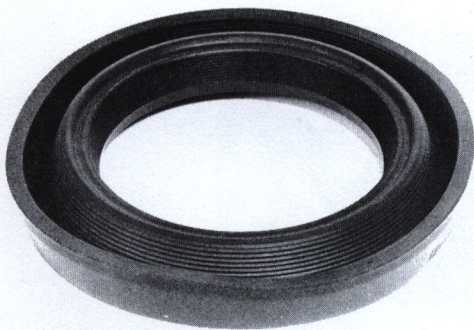

Folding Lens Hood



Eveready Case

## Accessories for Rollei Compact 35's



With its many convenient features, ranging from programmed CdS exposure system that sets both aperture and shutter speed, to a coupled rangefinder for rapid focusing, this lightweight 35mm camera makes great picture taking very simple. Finest image quality is assured by Sonnar formula lens developed for this camera by Carl Zeiss.

### Technical Data

#### Camera Type:

Fully automatic, compact 35mm with coupled rangefinder.

#### Picture Format:

24 x 36mm.

#### Lens:

5 element, 40mm f/2.3 Sonnar\*, M 46 x 0.75 screw-in filter thread; f/2.3 to f/16 automatic aperture settings.

#### Lens Focusing Range:

3¼ feet to infinity by coupled rangefinder.

#### Shutter:

Automatic settings from 1/30 to 1/650 sec. and bulb.

#### Shutter Release:

Bar with cable socket on top.

#### Self Timer:

Up to 10 second delay.

#### Exposure Control:

Programmed exposure control by CdS meter automatically sets lens aperture and shutter speed.

#### Flash Synchronization:

X (electronic flash) synchronization by hot shoe contact, focusing automatically selects aperture after guide number is set.

#### Film Speed Range:

ASA 25 to 400.

#### EV Range:

7.5 to 17.

#### Film Transport and Loading:

Accepts standard 35mm cartridge; film transported by rapid advance lever on top; rapid rewind crank; frame counter, counts forward from 1 to 36 with automatic return to zero when back is opened.

#### Viewfinder Data:

Bright line frame, parallax indicators, under exposure warning signal, aperture and shutter speed display.

#### Size:

4.4 x 1.3 x 2.8 inches.  
(112 x 32 x 71mm)

#### Weight:

12½ ounces.  
(355 gms.)

#### Other Features:

Lug on each side for wrist strap; tripod socket ¼-20 bushing; exposure meter reads through filter giving correct exposure compensation for filter density.

#### Exposure System Battery:

Single 1.35 volt cell (PX 625 or equivalent).

#### Accessories:

Soft Carrying Case, lens cap, filters, lens hood.

**730010** Rollei XF35 w/Wrist Strap, Lens Cap, Battery.

**970800** XF35 Case

**200630** 46mm UV Filter for XF35

**200640** 46mm R1.5 (Skylight) Filter for XF35

**200620** 46mm Medium Yellow Filter for XF35

**205820** 46mm Lenshood for XF35

\*Lens made by Rollei under license from Carl Zeiss, Oberkochen, West Germany.



**A superb, fully automated compact with rangefinder**